


## Stopping Plug (Plastic)

1. Suitable for sealing in the spare cable entry device in the electrical equipment, which can prevent water or dust from entering the spare entry. nylon plastic material.
2. Ex marking: Ex e IIC Gb.
3. Degree of protection: IP66.

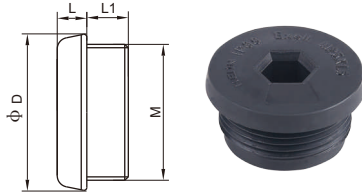

Specification	L1(mm)	L(mm)	φ D(mm)	Weight (kg)
M16×1.5	12	4	20	0.003
M20×1.5	12	4	25	0.004
M25×1.5	12	4	30	0.006
M32×1.5	16	4	38	0.012
M40×1.5	16	5	45	0.015
M50×1.5	16	6	60.5	0.025
M63×1.5	19	7.5	75	0.045

## Locknut

1. Used to connect the entry and the enclosure tightly. carbon steel, stainless steel or nickel plated brass material. specifications G1/2~G4, M16~M110 are available.
2. Thread specifications can be customized upon request.



Specification	Specification	Weight (kg)
—	M16×1.5	—
G1/2	M20×1.5	0.006
G3/4	M25×1.5	0.008
G1	M32×1.5	0.086
G1 1/4	M40×1.5	0.02
G1 1/2	M50×1.5	0.038
G2	M63×1.5	0.062
G2 1/2	M75×1.5	0.088
G3	M90×1.5	0.13
4	M110×1.5	0.2

## Washer


1. Used for sealing between the entry and the enclosure, waterproof and dustproof;
2. Material: PTFE;
3. Specifications: G1/2 G4, M16 M110, etc.



Specification	Specification	Weight (kg)
—	M16×1.5	—
G1/2	M20×1.5	0.001
G3/4	M25×1.5	0.002
G1	M32×1.5	0.003
G1 1/4	M40×1.5	0.004
G1 1/2	M50×1.5	0.005
G2	M63×1.5	0.006
G2 1/2	M75×1.5	0.12
G3	M90×1.5	0.14
G4	M110×1.5	0.2

## Earth Tag

The earth lug is made of brass and is used to provide an earth bond connection between the cable gland and the equipment

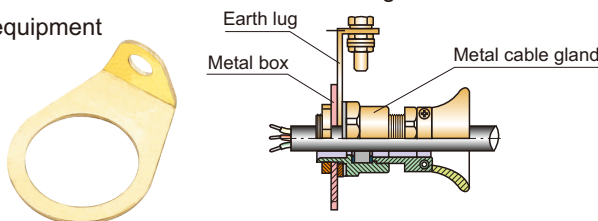

Specification	Specification	Weight (kg)	Rated short-circuit current per second (KA)
G1/2	M20×1.5	0.001	3.06
G3/4	M25×1.5	0.002	4
G1	M32×1.5	0.003	5.4
G1 1/4	M40×1.5	0.004	7.2
G1 1/2	M50×1.5	0.005	10.4
G2	M63×1.5	0.006	10.4
G2 1/2	M75×1.5	0.12	10.4
G3	M90×1.5	0.14	10.4
G4	M110×1.5	0.2	10.4

## AB Type Seal Packing Cement

1. Double characteristics of watertightness and endurance;
2. Non-corrosive, easy operation, convenient construction;
3. Mix two kinds of cement A and B to cure, higher strength;
4. Used for isolation, sealing, fire prevention and smoke prevention of steel pipes, cables, and wire wiring projects. Use with explosion-proof sealing bushing, and the effect is better (see Page D/03).



Weight: Yellow 1.0kg  
Black 1.0kg



## Shroud

Chloroprene rubber or PVC material, and is suitable for the appearance protection of the BDM series explosion-proof cable gland of various specifications.



## Compression Nut

- Used for cable sealing and clamping of cable wiring entry device.  
Aluminum alloy, carbon steel, stainless steel or nickel plated brass material.  
specifications G1/2~G4, M16~M110 are available.
- Thread specifications can be customized upon request.




## Pipe Clamp

- Formed by high-quality steel plate, and stainless steel is available upon request.  
Suitable for the installation of lamps on site.
- Specifications G1/2~G4 are available.



## U Type Pipe Clamp

- Used as a fixed clamp for the cable or cable pipe, the galvanized pipe of the instrument gas source, the sampling pipe of the analysis instrument and the process pipeline, when instrument electrical installation.;
- Round steel 20# material, galvanized treated surface.



Pipe size	Fixed nut	Dimension (mm)		
		B	L	R
G1/2	M6	30	28	12
G3/4	M6	34	30	14
G1	M6	42	35	18
G1 1/4	M8	50	40	21
G1 1/2	M8	58	44	25
G2	M8	70	51	31
G2 1/2	M8	84	55	38
G3	M8	94	60	43
G4	M10	126	80	58